



CEILING FANS

2021 COLLECTION



INTRODUCING CEILING FANS

After 50 years of manufacturing and distributing decorative lighting, Elstead is very proud to bring a new collection of ceiling fans to market. This first catalogue introduces a great selection of 16 Kichler models and we are currently developing many more fans so that we can offer a comprehensive collection of great designed fans to the 220-240V market place.

KICHLER®

SYMBOL GUIDE



This ceiling fan uses an AC motor.



This ceiling fan uses a DC motor, meaning it uses less electricity.



This ceiling fan can be used in dry indoor locations only.



This ceiling fan can withstand damp or humid conditions. It should be used in indoor spaces which might be affected by outdoor conditions.



This ceiling fan can withstand fair outdoor conditions and should be used in sheltered areas. It can still be used indoors.



This ceiling fan can withstand wet outdoor conditions. It can still be used indoors.



This ceiling fan has an IP rating of 20, meaning it is protected against dust and humidity.



This ceiling fan has an IP rating of 23, meaning it is protected against limited exposure to water spray.



This ceiling fan has an IP rating of 44, meaning it is protected against splashing water from any angle.



This ceiling fan comes fitted with an LED light source with low energy consumption.



This is the bladespan of the ceiling fan - its widest diameter. We provide the measurement in both centimetres and inches for ease of use.



STYLE IN MOTION

A light and appliance all in one; ceiling fans help shed light on what matters most while they bring comfort and style to any room – inside or outside. From open areas to cosy bedrooms, from grand living rooms to outdoor patios, there's a ceiling fan designed for you.

INDOOR LIVING

Add a breath of fresh air to any room. Any size, any finish, any style... this collection turns ceiling fans into focal points you will love looking at in any room.

>> See more on page 12



OUTDOOR LIVING

Keep your cool outside. Kichler ceiling fans bring style and airflow to your favourite al fresco entertaining spaces. Each offers premium finishes and hardware designed to withstand the elements for years of worry-free performance.

>> See more on page 30

TOP THINGS TO CONSIDER WHEN CHOOSING YOUR CEILING FAN

IS THE FAN FOR INSIDE OR OUTSIDE?

There are some restrictions on where a ceiling fan can be placed, depending on how much moisture it will come into contact with. The icons below are used in this catalogue as a quick visual guide to help you know what fan you need.



Indoor only

All of our indoor fans should be kept to areas where they will not come into contact with water, for example, indoor living spaces and bedrooms.



IP20 (Humid)

Ceiling fans with an IP20 (Humid) rating can be used in moderate humidity areas, for example, if you have a room that has bi-fold doors that integrates with the outdoors when opened. They cannot withstand direct contact with water.




IP23 (Damp)

Ceiling fans with an IP23 (Damp) rating can be used in high-humidity areas, like enclosed porches, sunrooms or utility rooms. They feature water-resistant, durable finishes and incorporate galvanised undercoating on all metal surfaces to protect against rusting. Also, their blades are made of either ABS plastic or sealed wood to ensure longevity against damp conditions.



IP44 (Wet)

Ceiling fans with an IP44 (Wet) rating can be used in open areas with direct exposure to sun, rain or water spray, like pergolas and open porches. They have highly durable finishes against rain and snow and include all-weather ABS plastic blades.

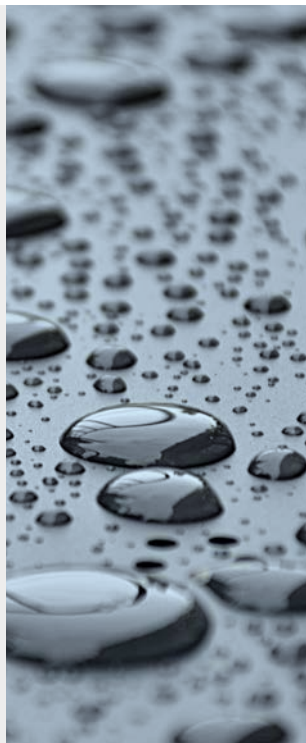

WHAT STYLE DO YOU WANT?


We have a variety of different styles and finishes in our collection, designed to fit all needs.

Our modern ceiling fans add a clean, understated look to open spaces. You can choose something more traditional to complement rooms with classic, elegant décor. Or blur the lines with a transitional ceiling fan that is simple and sophisticated with minimal ornamentation.



HOW BIG SHOULD THE FAN BE?

To determine the correct size ceiling fan for the space you intend to cool there are some measurements you must take first. This handy guide will give you more of an idea of what size fan you will need by assessing its future location.

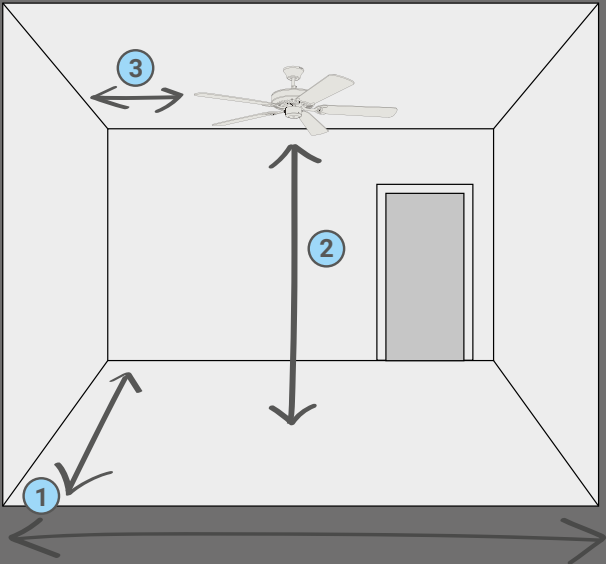

1

Measure the length and the width of the room or space and then multiply e.g. 12ft (3.7m) long by 10ft (3m) wide = 120 square feet. (11.1m²). Once you know the size of your space, you can narrow your search to select size fans. See the table below for guidance.

2

Measure the height of your ceiling. Fans should have a minimum of 7ft (2.1m) clearance between the bottom of the fan blades and the floor. Many of our ceiling fans work with 8ft (2.4m) or 9ft (2.7m) ceilings. If your ceiling is higher, you will need an additional down rod.

3

Bear in mind that all ceiling fans should have at least 12" (30cm) clearance from any wall or object. If you choose to use multiple fans, make sure there is a distance of at least 39" (99cm) between the blade tips of one fan and the next.

ROOM SIZE	ROOM TYPE	BLADE SWEEP
90 sq. ft. (8.36m ²) or less	Small bedroom or office, galley kitchen, outdoor applications	15" to 42" (38 - 107cm)
90 - 100 sq.ft (8.36 - 9.29m ²)	Over a kitchen table, large walk -in closet, laundry room, small screened-in porch, outdoor applications	44" to 48" (112 - 122cm)
100 - 150 sq. ft (9.29 - 13.94m ²)	Bedroom, larger kitchen, formal dining room, outdoor applications	50" to 54" (127 - 137cm)
150 - 300 sq. ft (13.94 - 27.87m ²)	Great room, Large outdoor patio, Master suite, outdoor applications	56" to 70" (142 - 178cm) or multiple fans
Over 300 sq. ft (27.87m ²)	Lobbies, Restaurants, Large open spaces	Over 70" (178cm +) or multiple fans

ECO-FRIENDLY LIGHTING

You may wish to combine overhead lighting with your ceiling fan. All of our ceiling fans that have integrated lights use either LED modules or take replaceable LED bulbs.

LED

Look out for the LED symbol on each product page to find these models.




CUSTOMISATION


Some fans come with 2 sided blades so that you can customise the colour choice when you refresh your home décor.

All semi-flush models can be extended with additional downrods to bring the fan lower in rooms with high ceilings. See **page 44** for our full offering.

REDUCE ENERGY COSTS IN YOUR HOME CIRCULATE AIR WITH THE SEASONS

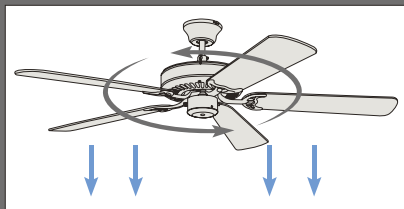

When it's hot outside, set the fan to rotate in an **anti-clockwise direction**. The blades will push air down – creating a breeze or cooling effect. A fan can make you feel 4°C cooler than the temperature of your surroundings.

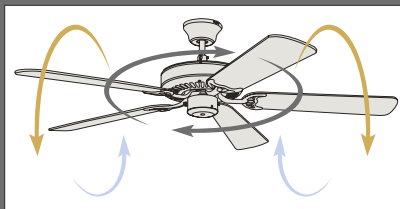

In the winter, set the fan to rotate **clockwise**. The blades will pull the air up and around, moving the warm air that rises to the ceiling back down to the living space.

The effect can help you adjust your thermostat +2.2°C (4°F) during the Summer and -1.1°C (2°F) in the Winter. This makes a fan the only money-saving appliance in your home as it contributes to lower energy costs. (This is not applicable in the same way to outdoor fans.)

CEILING FAN PERFORMANCE GUIDE

AIRFLOW is measured in Cubic Feet per Minute (CFM). The higher the airflow number, the more the air the fan is circulating.

POWER USAGE for your fan motor is measured in watts. The lower the watts, the less energy the fan consumes. DC motor ceiling fans are the most energy-efficient, using the least amount of wattage.

AIRFLOW EFFICIENCY gives you the total picture: dividing the fan's CFMs by the watts of power it consumes. The higher the airflow efficiency number, the more air the fan is moving per watt.

AIR PERFORMANCE

AIRFLOW
Cubic ft. per minute on high **6200**

POWER USAGE
Watts on High (excludes light) **84.3**

AIRFLOW EFFICIENCY
Cubic ft. per minute per Watt **74**

TIME TO CHOOSE YOUR FAN

This table provides a quick glance over the basic details of our fans. It will help you quickly decide which is the right fan for you.

	Dimensions				Motor Type		Location Rating				Light		Accessories	
Model	S	M	L	XL	AC	DC	Outdoor (IP44/ Wet)	Outdoor (IP23/ Damp)	Indoor (IP20/ Humid)	Indoor (Dry)	Integrated LED	Replaceable Bulbs	Remote Control	Page No.
Ahrendale			•		•		•				•		•	36-37
Colerne		•			•					•	•		•	20-21
Eris			•		•		•				•		•	34-35
Lyndon Patio		•			•			•				•	•	38-39
Phree			•		•				•		•		•	22-25
Ried			•		•				•				•	18-19
Sola	•				•			•			•		•	40-43
Terna	•				•					•	•		•	14-17
Xety			•		•					•	•		•	26-27
Zeus			•		•					•	•		•	10-13





INDOOR CEILING FANS

Add a breath of fresh air to any room. Any size, any finish, any style... this collection turns ceiling fans into focal points you will love looking at in any room. There are many unique modern and traditional styles and some very interesting textures from Kichler such as Anvil Iron, Satin Black and Weathered Zinc.

CONTENTS

<u>Colerne</u>	<u>20-21</u>
<u>Phree</u>	<u>22-25</u>
<u>Ried</u>	<u>18-19</u>
<u>Terna</u>	<u>14-17</u>
<u>Xety</u>	<u>26-27</u>
<u>Zeus</u>	<u>10-13</u>



ZEUS

60" / 152cm
bladespan

Contrasting polished and matte finishes combine for a powerful visual effect that adds a wow-factor to any large space. The sleek look features blades that are held in place in tandem. Known as "blade irons," this functional – yet unique – metal construction gives the fan a style that works beautifully in contemporary spaces.



ZEUS

152
cm

60
inch

AC

LED




KLF-ZEUS-60-BN
Finish: Brushed Nickel



INCLUDED FEATURES
Downrods 25mm OD x 114mm
Light Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable
Light Glass White Polycarbonate Lens

INCLUDED CONTROLS
 REMOTE CONTROL
<ul style="list-style-type: none">3 forward speeds, reverse & motor offlights on/off with full-range dimming

HANGING MEASUREMENTS	
Min. Fixture Drop (from ceiling)	A: 46cm
Min. Blade Drop (from ceiling)	B: 29cm
Housing (width)	C: 22cm
Ceiling Canopy (width)	D: 15cm

FAN FEATURES
Mounting Slope/Pitch 30°
IP Rating IP20 (Dry)
Hanging Weight 11.29kg
Body Material Steel
Warranty Limited Lifetime
MOTOR FEATURES
Motor Size/Type 188mm x 25mm, AC
Amps 0.406 on High
RPM (High/Low) 171/68



BLADE SPECS	
Blades (3) included	
Pitch	14°
Material	Wood
Blade Finish	
	
Silver (side 1)	Silver (side 2)

AIR PERFORMANCE	
AIRFLOW Cubic ft. per minute on high	6200
POWER USAGE Watts on High (excludes light)	84.3
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	74



LED

AC

60
inch152
cm

ZEUS



KLF-ZEUS-60-WHT

Finish: White

INCLUDED FEATURES

Downrods 25mm OD x 114mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable**Light Glass** White Polycarbonate Lens

FAN FEATURES

Mounting Slope/Pitch 30°**IP Rating** IP20 (Dry)**Hanging Weight** 11.29kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (3) included

Pitch 14°

Material Wood

Blade Finish

Silver
(side 1)Silver
(side 2)

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 188mm x 25mm, AC**Amps** 0.406 on High**RPM (High/Low)** 171/68

HANGING MEASUREMENTS

Min. Fixture Drop A: 46cm
(from ceiling)**Min. Blade Drop** B: 29cm
(from ceiling)**Housing** (width) C: 22cm**Ceiling Canopy** D: 15cm
(width)

AIR PERFORMANCE

AIRFLOW

Cubic ft. per minute on high

6200**POWER USAGE**

Watts on High (excludes light)

84.3**AIRFLOW****EFFICIENCY**

Cubic ft. per minute per Watt

74



TERNA

15" / 38cm
bladespan

Terna offers the fun and whimsy of a pinwheel, modernised. The size and scale make it ideal for use in small spaces or in multiples. Think walk in closets, dining nooks or over a desk.





KLF-TERNA-15-BN

Finish: Brushed Nickel

INCLUDED FEATURES

- Downrods** 25mm OD x 114mm
- Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable
- Light Glass** Etched Cased Opal

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

HANGING MEASUREMENTS


Min. Fixture Drop (from ceiling)	A: 50cm
Min. Blade Drop (from ceiling)	B: 49cm
Housing (width)	C: 27cm
Ceiling Canopy (width)	D: 16cm

FAN FEATURES

- Mounting Slope/Pitch** 22°
- IP Rating** IP20 (Dry)
- Hanging Weight** 7.28kg
- Body Material** Steel
- Warranty** Limited Lifetime

MOTOR FEATURES

- Motor Size/Type** 153mm x 15mm, AC
- Amps** 0.158 on High
- RPM (High/Low)** 300/105



BLADE SPECS

Blades (5) included	
Pitch	variable°
Material	Polycarbonate

Blade Finish



Champagne
(side 1)



Champagne
(side 2)

AIR PERFORMANCE

AIRFLOW Cubic ft. per minute on high	141
POWER USAGE Watts on High (excludes light)	36.1
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	4



LED

AC

15
inch38
cm

TERNA



KLF-TERNA-15-BB

Finish: Oil Brushed Bronze

INCLUDED FEATURES

Downrods 25mm OD x 114mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable**Light Glass** Etched Cased Opal

FAN FEATURES

Mounting Slope/Pitch 22°**IP Rating** IP20 (Dry)**Hanging Weight** 7.28kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (5) included

Pitch variable°

Material Polycarbonate

Blade Finish

Oil Brushed
Bronze
(side 1)Oil Brushed
Bronze
(side 2)

INCLUDED CONTROLS


REMOTE
CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 153mm x 15mm, AC**Amps** 0.158 on High**RPM (High/Low)** 300/105

HANGING MEASUREMENTS

Min. Fixture Drop (from ceiling) **A:** 50cm**Min. Blade Drop** (from ceiling) **B:** 49cm**Housing** (width) **C:** 27cm**Ceiling Canopy** (width) **D:** 16cm

AIR PERFORMANCE

AIRFLOW

Cubic ft. per minute on high

141

POWER USAGE

Watts on High (excludes light)

36.1

AIRFLOW
EFFICIENCY

Cubic ft. per minute per Watt

4



RIED

56" / 142cm
bladespan

Get a wood-blade look in a style that works in damp spaces, like an enclosed patio or sunroom. Ried combines unique wood tones with a rustic-inspired finish for a fan that delivers on the emerging modern industrial trend.



KICHLER



IP20

AC

56
inch142
cm

RIED



KLF-RIED-56AVI

Finish: Anvil Iron

INCLUDED FEATURES

Downrods 25mm OD x 152mm

FAN FEATURES

Mounting Slope/Pitch 22°**IP Rating** IP20 (Humid)**Hanging Weight** 6.62kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (3) included

Pitch 14°

Material ABS

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds & motor off

MOTOR FEATURES

Motor Size/Type 172mm x 12mm, AC**Amps** 0.282 on High**RPM (High/Low)** 176/78**Blade Finish**Driftwood
(side 1)Driftwood
(side 2)

HANGING MEASUREMENTS

Min. Fixture Drop **A:** 36cm
(from ceiling)**Min. Blade Drop** **B:** 34cm
(from ceiling)**Housing** (width) **C:** 20cm**Ceiling Canopy** **D:** 15cm
(width)**AIR PERFORMANCE****AIRFLOW**

Cubic ft. per minute on high

6057**POWER USAGE**

Watts on High (excludes light)

65.3**AIRFLOW EFFICIENCY**

Cubic ft. per minute per Watt

93



COLERNE

52" / 132cm
bladespan

You'll love the vintage industrial feel that Colerne brings to a space. Wood-tone blades create the look of rustic wood, while metal accents deliver a style that's at home in farmhouse or modern settings. Integrated, dimmable LED downlighting allows you to fill a space with just the right amount of light.

KICHLER



LED

AC

52
inch132
cm

COLERNE



KLF-COLERNE-52-BN

Finish: Brushed Nickel

INCLUDED FEATURES

Downrods 25mm OD x 152mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable**Light Glass** Etched Cased Opal

FAN FEATURES

Mounting Slope/Pitch 30°**IP Rating** IP20 (Dry)**Hanging Weight** 10.3kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (5) included

Pitch 12°

Material Wood

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 172mm x 15mm, AC**Amps** 0.256 on High**RPM (High/Low)** 175/78**Blade Finish**Weathered
White Walnut
(side 1)Weathered
White Walnut
(side 2)

HANGING MEASUREMENTS

Min. Fixture Drop **A:** 43cm
(from ceiling)**Min. Blade Drop** **B:** 32cm
(from ceiling)**Housing** (width) **C:** 24cm**Ceiling Canopy** **D:** 18cm
(width)**AIR PERFORMANCE****AIRFLOW**

Cubic ft. per minute on high

5190**POWER USAGE**

Watts on High (excludes light)

59.2**AIRFLOW EFFICIENCY**

Cubic ft. per minute per Watt

88



PHREE

56" / 142cm
bladespan

Sleek, stylish and solid with a triangular body and precision blades molded into one piece, creating a seamless contemporary design. The dimmable center light provides a focal point as well as adding whole-room ambient light.



PHREE

142
cm

56
inch

AC

LED

IP20



KLF-PHREE-56-BN

Finish: Brushed Nickel

INCLUDED FEATURES

Downrods 25mm OD x 114mm
Light Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable
Light Glass Etched Cased Opal

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

HANGING MEASUREMENTS


Min. Fixture Drop (from ceiling)	A: 41cm
Min. Blade Drop (from ceiling)	B: 39cm
Housing (width)	C: 24cm
Ceiling Canopy (width)	D: 17cm

FAN FEATURES

Mounting Slope/Pitch 30°
IP Rating IP20 (Humid)
Hanging Weight 10.57kg
Body Material ABS
Warranty Limited Lifetime

MOTOR FEATURES

Motor Size/Type 188mm x 20mm, AC
Amps 0.305 on High
RPM (High/Low) 130/54



BLADE SPECS

Blades (3) included	
Pitch	22°
Material	ABS

Blade Finish



Nickel
(side 1)



Nickel
(side 2)

AIR PERFORMANCE

AIRFLOW Cubic ft. per minute on high	6350
POWER USAGE Watts on High (excludes light)	69.9
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	91



IP20

LED

AC

56
inch142
cm

PHREE



KLF-PHREE-56-WHT

Finish: White

INCLUDED FEATURES

Downrods 25mm OD x 114mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable**Light Glass** Etched Cased Opal

FAN FEATURES

Mounting Slope/Pitch 30°**IP Rating** IP20 (Humid)**Hanging Weight** 10.57kg**Body Material** ABS**Warranty** Limited Lifetime

BLADE SPECS

Blades (3) included

Pitch 22°

Material ABS

Blade Finish

White
(side 1)White
(side 2)

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 188mm x 20mm, AC**Amps** 0.305 on High**RPM (High/Low)** 130/54

HANGING MEASUREMENTS

Min. Fixture Drop **A:** 41cm
(from ceiling)**Min. Blade Drop** **B:** 39cm
(from ceiling)**Housing** (width) **C:** 24cm**Ceiling Canopy** **D:** 17cm
(width)

AIR PERFORMANCE

AIRFLOW

Cubic ft. per minute on high

6350**POWER USAGE**

Watts on High (excludes light)

69.9**AIRFLOW EFFICIENCY**

Cubic ft. per minute per Watt

91



XETY

56" / 142cm
bladespan

Xety does more with less: the two innovative blades deliver air movement while the dimmable LED light brings brilliant illumination to a space. Authentic industrial hardware enhances the visual interest.



LED

AC

56
inch142
cm

XETY



KLF-XETY-56-OZ

Finish: Olde Bronze

INCLUDED FEATURES

Downrods 25mm OD x 114mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable

FAN FEATURES

Mounting Slope/Pitch 30°**IP Rating** IP20 (Dry)**Hanging Weight** 9.27kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (2) included

Pitch 16°

Material Polycarbonate

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 188mm x 20mm, AC**Amps** 0.294 on High**RPM (High/Low)** 175/68**Blade Finish**Oil Brushed
Bronze
(side 1)Oil Brushed
Bronze
(side 2)

HANGING MEASUREMENTS

Min. Fixture Drop **A:** 35cm
(from ceiling)**Min. Blade Drop** **B:** 28cm
(from ceiling)**Housing** (width) **C:** 14cm**Ceiling Canopy** **D:** 15cm
(width)**AIR PERFORMANCE****AIRFLOW**

Cubic ft. per minute on high

5865**POWER USAGE**

Watts on High (excludes light)

68.1**AIRFLOW EFFICIENCY**

Cubic ft. per minute per Watt

86



XETY 56" / 142cm bladespan

Xety does more with less: the two innovative blades deliver air movement while the dimmable LED light brings brilliant illumination to a space. Authentic industrial hardware enhances the visual interest.



LED

AC

56
inch142
cm

XETY



KLF-XETY-56-BN

Finish: Brushed Nickel

INCLUDED FEATURES

Downrods 25mm OD x 114mm**Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable

FAN FEATURES

Mounting Slope/Pitch 30°**IP Rating** IP20 (Dry)**Hanging Weight** 9.27kg**Body Material** Steel**Warranty** Limited Lifetime

BLADE SPECS

Blades (2) included

Pitch 16°

Material Polycarbonate

INCLUDED CONTROLS


**REMOTE CONTROL**

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 188mm x 20mm, AC**Amps** 0.294 on High**RPM (High/Low)** 175/68**Blade Finish**Champagne
(side 1)Champagne
(side 2)

HANGING MEASUREMENTS

Min. Fixture Drop **A:** 35cm
(from ceiling)**Min. Blade Drop** **B:** 28cm
(from ceiling)**Housing (width)** **C:** 14cm**Ceiling Canopy** **D:** 15cm
(width)**AIR PERFORMANCE****AIRFLOW**

Cubic ft. per minute on high

5865**POWER USAGE**

Watts on High (excludes light)

68.1**AIRFLOW EFFICIENCY**

Cubic ft. per minute per Watt

86





OUTDOOR CEILING FANS

Keep your cool outside. These ceiling fans bring style and airflow to your favourite al fresco entertaining spaces. Each offers premium finishes and hardware designed to withstand the elements for years of worry-free performance. Best of all: these fans can also be used indoors – so you can carry the look inside.

Be sure to choose a fan rated for your particular space. If you are uncertain, see more info on page 4.

CONTENTS

Ahrendale	36-37
Eris	32-35
Lyndon Patio	38-39
Sola	40-43

WET



IP44



ERIS

60" / 152cm
bladespan

Designed to nestle cleanly against the ceiling while still delivering a generous amount of airflow, Eris marries performance with style. Use inside or out – the sleek design, wet rating and 1,500-lumen dimmable light output bring room-filling light to a variety of gathering spaces, including open-air patios or decks.

KICHLER



ERIS

152
cm

60
inch

AC

LED

IP44



KLF-ERIS-60-WN
Finish: Walnut


INCLUDED FEATURES
Downrods Flush Mount
Light Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K80 CRI, Dimmable
Light Glass Etched Cased Opal


INCLUDED CONTROLS	 <div>REMOTE CONTROL<ul style="list-style-type: none">3 forward speeds, reverse & motor offlights on/off with full-range dimming</div>
-------------------	---

FAN FEATURES
Mounting Slope/Pitch °
IP Rating IP44 (Wet)
Hanging Weight 11.69kg
Body Material ABS
Warranty Limited Lifetime

MOTOR FEATURES
Motor Size/Type 188mm x 20mm, AC
Amps 0.289 on High
RPM (High/Low) 127/55

BLADE SPECS
Blades (3) included
Pitch25°
MaterialABS

Blade Finish	
 Walnut (side 1)	 Walnut (side 2)

HANGING MEASUREMENTS	
Min. Fixture Drop (from ceiling) A: 29cm	
Min. Blade Drop (from ceiling) B: 23cm	
Housing (width) C: 25cm	
Ceiling Canopy (width) D: 20cm	

AIR PERFORMANCE	
AIRFLOW Cubic ft. per minute on high	4043
POWER USAGE Watts on High (excludes light)	66.4
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	61



ERIS



KLF-ERIS-60-BN

Finish: Brushed Nickel

INCLUDED FEATURES

- Downrods** Flush Mount
- Light** Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K80 CRI, Dimmable
- Light Glass** Etched Cased Opal

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

HANGING MEASUREMENTS

Min. Fixture Drop (from ceiling)	A: 29cm
Min. Blade Drop (from ceiling)	B: 23cm
Housing (width)	C: 25cm
Ceiling Canopy (width)	D: 20cm

FAN FEATURES

- Mounting Slope/Pitch** °
- IP Rating** IP44 (Wet)
- Hanging Weight** 11.69kg
- Body Material** ABS
- Warranty** Limited Lifetime

MOTOR FEATURES



- Motor Size/Type** 188mm x 20mm, AC
- Amps** 0.289 on High
- RPM (High/Low)** 127/55

BLADE SPECS

Blades (3) included

Pitch	25°
Material	ABS

Blade Finish

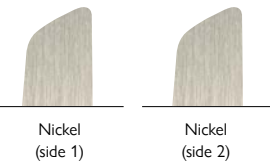

AIR PERFORMANCE

AIRFLOW Cubic ft. per minute on high	4043
POWER USAGE Watts on High (excludes light)	66.4
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	61

WET



IP44



AHRENDALE

60" / 152cm
bladespan

This 60 inch ceiling fan has the Anvil Iron Finish and an anvil mesh shade to add a timeworn charm over seating areas, in game rooms or anywhere you want a touch of industrial-inspired style.

KICHLER



AHRENDALE



KLF-AHRENDALE-60-AVI

Finish: Anvil Iron

INCLUDED FEATURES

- Downrods** 25mm OD x 114mm
- Light** Integrated, Replaceable, 1x 10W LED, Dimmable
- Light Glass** Etched Cased Opal

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

HANGING MEASUREMENTS

- Min. Fixture Drop** (from ceiling) **A:** 42cm
- Min. Blade Drop** (from ceiling) **B:** 25cm
- Housing** (width) **C:** 30cm
- Ceiling Canopy** (width) **D:** 17cm

FAN FEATURES

- Mounting Slope/Pitch** 30°
- IP Rating** IP44 (Wet)
- Hanging Weight** 14.35kg
- Body Material** Steel
- Warranty** Limited Lifetime

MOTOR FEATURES

- Motor Size/Type** 188mm x 20mm, AC
- Amps** 0.28 on High
- RPM (High/Low)** 163/67

BLADE SPECS

Blades (5) included

Pitch	12°
Material	ABS


Blade Finish



Distressed
Antique Gray
(side 1)



Distressed
Antique Gray
(sie 2)



AIR PERFORMANCE

AIRFLOW Cubic ft. per minute on high	6520
POWER USAGE Watts on High (excludes light)	64.3
AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	101



DAMP

IP23

LYNDON PATIO

52" / 132cm
bladespan

The 52 inch Lyndon Patio fan is finished in Olde Bronze with reversible blades in either Medium or Dark Walnut. It co-ordinates with the Lyndon outdoor collection and is IP23 rated for covered outdoor living areas.





KICHLER



LYNDON PATIO



KLF-LYNDON-52-OZ
Finish: Olde Bronze

INCLUDED FEATURES		FAN FEATURES		BLADE SPECS	
Downrods 25mm OD x 114mm		Mounting Slope/Pitch 30°		Blades (5) included	
Light 3x 8W LED E27 (Lamps not supplied)		IP Rating IP23 (Wet)		Pitch	13°
Light Glass Clear Seeded		Hanging Weight 10.67kg		Material	ABS
		Body Material Steel		Blade Finish	
		Warranty Limited Lifetime			
INCLUDED CONTROLS		MOTOR FEATURES			
		Motor Size/Type 172mm x 15mm, AC		Medium Walnut (side 1)	
REMOTE CONTROL		Amps 0.238 on High		Dark Walnut (side 2)	
<ul style="list-style-type: none">• 3 forward speeds & motor off• lights on/off		RPM (High/Low) 156/75			
HANGING MEASUREMENTS				AIR PERFORMANCE	
Min. Fixture Drop (from ceiling)	A: 48cm			AIRFLOW Cubic ft. per minute on high	4915
Min. Blade Drop (from ceiling)	B: 34cm			POWER USAGE Watts on High (excludes light)	54.7
Housing (width)	C: 24cm			AIRFLOW EFFICIENCY Cubic ft. per minute per Watt	90
Ceiling Canopy (width)	D: 17cm				



DAMP

IP23

SOLA 34" / 86cm bladespan

This Matte White 34 inch ceiling fan from the Sola collection can be used outside. It features integrated dimmable LED lighting and flush mount installation. The globe inspired motor housing shape brings delightful style to any space. A metal fixture cap is included for non light use installations.

KICHLER



SOLA



KLF-SOLA-34-WHT

Finish: Matte White

INCLUDED FEATURES

Downrods Flush Mount

Light Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable

Light Glass Etched Cased Opal

FAN FEATURES

Mounting Slope/Pitch °

IP Rating IP23 (Damp)

Hanging Weight 6.94kg

Body Material Steel

Warranty Limited Lifetime


BLADE SPECS

Blades (3) included

Pitch 22°

Material ABS

Blade Finish

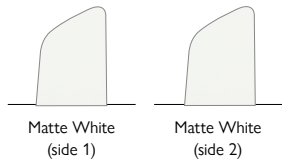

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 172mm x 12mm, AC

Amps 0.234 on High

RPM (High/Low) 247/123


HANGING MEASUREMENTS

Min. Fixture Drop A: 28cm
(from ceiling)

Min. Blade Drop B: 18cm
(from ceiling)

Housing (width) C: 22cm

Ceiling Canopy D: 17cm
(width)



AIR PERFORMANCE

AIRFLOW
Cubic ft. per minute on high **4048**

POWER USAGE
Watts on High (excludes light) **53.8**

AIRFLOW EFFICIENCY
Cubic ft. per minute per Watt **75**



DAMP

IP23

SOLA

34" / 86cm
bladespan

This Brushed Nickel 34 inch ceiling fan from the Sola collection can be used outside. It features integrated dimmable LED lighting and flush mount installation.

The globe inspired motor housing shape brings delightful style to any space. A metal fixture cap is included for non light use installations.

KICHLER



SOLA



KLF-SOLA-34-BN

Finish: Brushed Nickel

INCLUDED FEATURES

Downrods Flush Mount

Light Integrated, Replaceable, 1x 10W LED, 1116 lm, 3000K, 80 CRI, Dimmable

Light Glass Etched Cased Opal

FAN FEATURES

Mounting Slope/Pitch °

IP Rating IP23 (Damp)

Hanging Weight 6.94kg

Body Material Steel

Warranty Limited Lifetime

BLADE SPECS

Blades (3) included

Pitch 22°

Material ABS

Blade Finish



Silver
(side 1)



Silver
(side 2)

INCLUDED CONTROLS



REMOTE CONTROL

- 3 forward speeds, reverse & motor off
- lights on/off with full-range dimming

MOTOR FEATURES

Motor Size/Type 172mm x 12mm, AC

Amps 0.234 on High

RPM (High/Low) 247/123


HANGING MEASUREMENTS

Min. Fixture Drop **A:** 28cm
(from ceiling)

Min. Blade Drop **B:** 18cm
(from ceiling)

Housing (width) **C:** 22cm

Ceiling Canopy **D:** 17cm
(width)



AIR PERFORMANCE

AIRFLOW

Cubic ft. per minute on high

4048

POWER USAGE

Watts on High (excludes light)

53.8

AIRFLOW

EFFICIENCY

Cubic ft. per minute per Watt

75

DOWNROD EXTENSIONS

All semi-flush ceiling fans come complete with one short downrod between 4 - 7" long (102 - 203mm). You can check the downrod section on each product page to find out what the length is for your chosen fan. This rod can be added to or replaced with our downrod extension accessories.

Satin White Painted	
Length (ins)	Product Code
6" (15cm)	CLF-DOWNROD15-SWP
12" (30cm)	CLF-DOWNROD30-SWP
18" (45cm)	CLF-DOWNROD45-SWP

Satin Black Painted	
Length (ins)	Product Code
6" (15cm)	CLF-DOWNROD15-SBP
12" (30cm)	CLF-DOWNROD30-SBP
18" (45cm)	CLF-DOWNROD45-SBP

Old Bronze Painted	
Length (ins)	Product Code
6" (15cm)	CLF-DOWNROD15-OBP
12" (30cm)	CLF-DOWNROD30-OBP
18" (45cm)	CLF-DOWNROD45-OBP

Satin Nickel Painted	
Length (ins)	Product Code
6" (15cm)	CLF-DOWNROD15-SNP
12" (30cm)	CLF-DOWNROD30-SNP
18" (45cm)	CLF-DOWNROD45-SNP







INDEX

Ahrendale	60
Colerne	38
Eris	56
Lyndon Patio	76
Phree	42
Ried	36
Sola	78, 80
Terna	32
Xety	46, 48
Zeus	18





UK HEAD OFFICE

Elstead Lighting Ltd.
Elstead House, Mill Lane, Alton,
Hampshire, GU34 2QJ, UK

UK SALES

T: 01420 82377
F: 01420 89261
E: enquiries@elsteadlighting.com

EXPORT SALES (UK)

T: +44 (0) 1420 590509
F: +44 (0) 1420 590005
E: export@elsteadlighting.com

ELSTEAD EUROPEAN OFFICE

EXPORT SALES (POLAND)

Elstead Lighting Sp. z o.o.
ul. Sportowa 12
32-083 Balice, Poland
T: +48 124441091
F: +48 124441966
E: zamowienia@elstead-lighting.pl

ELSTEAD GERMANY

Elstead Lighting Ltd,
c/o: Annette Allee 33,
48149 Münster, Deutschland
T: +49 (0)151 645 86 315
E: wdecorte@elsteadlighting.com

ELSTEAD SLOVAKIA

Elstead Lighting, S. R. O.
Villa Hungaria, Razusova 9
Piestany, 92101, Slovakia
T: +421 (0) 940 853483
E: sales@elsteadlighting.sk

ELSTEAD MIDDLE EAST

Elstead Lighting / The Ceiling Fan
Company L.L.C.,
P.O. Box 282188,
Dubai, United Arab Emirates
T: +971 4 388 3025
F: +971 4 388 3031
E: dubaioffice@elsteadlighting.com